



POWER550M10-72

Bifacial Dual Glass 530W-550W
LEADING 5%-25% MORE YIELD
EFFICIENCY UP TO 21.2%

 **US Local Service**

 **Same Day Shipping**

- Dimensions: 2285*1134*35mm
- Weight: 32.2kg
- Max. System Voltage: 1500 V/DC(IEC)

GREAT PERFORMANCE AND RELIABILITY

- ★ Bi-facial Perc Half Cut Technology
- ★ Better Energy Yield
- ★ Power Degradation -0.45%/30 Years Linear Warranty
- ★ TUV SUD Anti PID Certificated
- ★ IP68 Junction Box/High Water Proof Level
- ★ Reduced Hot Spot Risk

PERFORMANCE WARRANTY

12 Years Enhanced Product Warranty on Materials and Workmanship

30 Years Linear Power Performance Warranty According to the applicable Bluesun Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems

PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / IEC 61701 / IEC TS 62804
- UL 1703 / UL61730



ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	530	535	540	545	550
Operating Voltage (Vmpp/V)	41.32	41.48	41.64	41.80	41.96
Operating Current (Imp/A)	12.83	12.90	12.97	13.04	13.11
Open-Circuit Voltage (Voc/V)	49.32	49.46	49.60	49.76	49.92
Short-Circuit Current (Isc/A)	13.72	13.79	13.86	13.93	14.00
Module Efficiency ηm(%)	20.5	20.6	20.8	21.0	21.2

Performance at NMOT

Maximum Power (Pmax/W)	395	398	402	406	410
Operating Voltage (Vmpp/V)	38.6	38.7	38.8	39.0	39.1
Operating Current (Imp/A)	10.24	10.30	10.36	10.41	10.47
Open-Circuit Voltage (Voc/V)	46.4	46.5	46.7	46.8	47.0
Short-Circuit Current (Isc/A)	11.06	11.12	11.17	11.23	11.28

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

Electrical characteristics with different rear side power gain (refer to 530W front)

Pmax gain	Pmax/W	Vmpp/V	Imp/A	Voc/V	Isc/A
5%	557	41.32	13.47	49.32	14.41
10%	583	41.32	14.11	49.32	15.09
15%	610	41.32	14.75	49.32	15.78
20%	636	41.32	15.40	49.32	16.46
25%	663	41.32	16.04	49.32	17.15

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	182*182mm
Cell Arrangement	144 (6*24)
Weight	32.2kg
Module Dimensions	2285*1134*35mm
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² (0.006inches ²)/UL: 12AWG
Front Glass	2.0mm (0.08 inches) AR Coating Semi-tempered Glass
Back Glass	2.0mm (0.08 inches) Glazed Semi-tempered Glass
No. of Bypass Diodes	3
Packing Configuration (1)	31pcs/carton, 620pcs/40hq
Packing Configuration (for USA)	31pcs/carton, 558pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

OPERATING CONDITIONS


Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	30A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2
Backside Output Ratio*	70%±5%
*Under STC: Backside Output Ratio = $P_{\max(\text{rear})} / P_{\max(\text{front})}$	

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.35%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.048%/°C
NMOT	43±2°C

I-V CURVE

POWER540M10-72

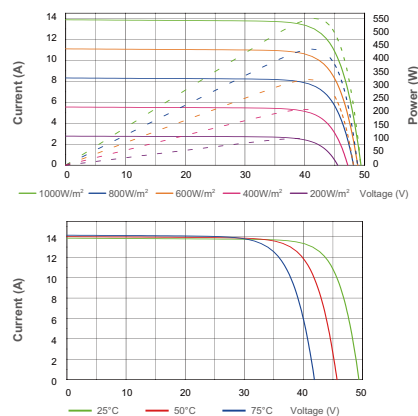

TECHNICAL DRAWINGS

